


Permanent Split Capacitor MOJAVE® Series Condenser Fan 5.6" Diameter, Totally Enclosed Air Over (TEAO)

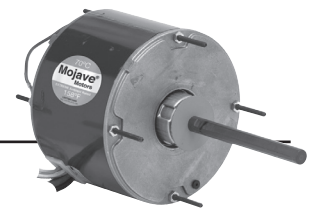


APPLICATIONS:

Residential and commercial condenser unit fan motors in extreme temperature locations.

FEATURES:

- 158°F (70°C) Ambient Design
- Ball Bearings Have All Angle Thrust System
- Class F Insulation
- Suitable for use with 370V Capacitors
- Extended Studs
- 48" Leads
- Hubless Lead End
- Drain Holes Both Ends
- Reversible Rotation
- Automatic Reset Thermal Overload Protector
- Continuous Duty
- 208v will not be marked on DOE regulated spread-voltage motors. Refer to online data
- **Discount Symbol: DS-3HAC**

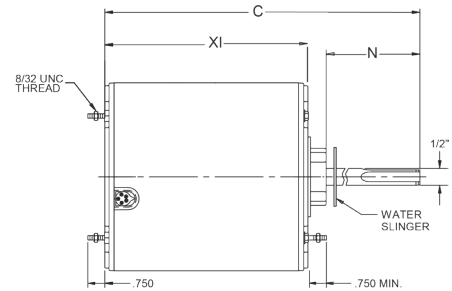

Stud Mount, Without Capacitor, Extreme High Ambient Design, All Angle Mount

HP	RPM/ Spd.	Voltage	Catalog Number	List	Cap. MFD	Amps	Shaft N	Shell XI	Total C	Ship Wt.	Notes
1/8	825	208-230	1872H	◆	5.0	0.78	6.0	4.3	10.6	13.7	H25
1/6	825	208-230	1873H	◆	5.0	1.2	6.0	4.3	10.6	14	H25
	1075	208-230	1859H	◆	5.0	1	5.0	4.0	9.4	11	H25
1/4	1075	208-230	1860H	◆	5.0	1.7	6.0	4.1	10.6	12	H25
1/4-1/8	825	208-230	1874H	◆	5.0	2.1	6.0	4.4	10.9	13.0	H25
1/3-1/6	825/2	208-230	5464H	◆	7.5	1.9	4.5	5.3	10.3	18	H43
	1075/2	208-230	5462H	◆	5.0	2.6	4.5	4.6	9.6	14.4	H43
	1075	208-230	3323H	◆	7.5	2.0	5.0	4.3	9.3	10	B, H25
1/3	1075	208-230	1861H	◆	7.5	2.1	6.0	4.6	11.1	18	H25
1/3-1/5	825	208-230	1875H	◆	7.5	2.4	6.0	5.3	11.6	18.4	H25
1/2-1/5	1075/2	208-230	5465H	◆	10.0	3	4.5	5.3	10.3	20	H43
	1075	208-230	3325H	◆	15.0	2.6-1.7	5.0	5.8	10.8	17	
1/2	1075	208-230	1862H	◆	10.0	3.2	6.0	5.3	11.9	19	H25
	825	208-230	1870H	◆	10.0	3.3	6.0	5.8	12.4	17.0	
3/4	1075	208-230	1868H	◆	10.0	4.7	6.0	5.8	12.4	21	
3/4-1/4	1075/2	208-230	5482H	◆	15.0	4.5	5.0	6.3	11.9	21	H43

460 Volt

HP	RPM/ Spd.	Voltage	Catalog Number	List	Cap. MFD	Amps	Shaft N	Shell XI	Total C	Ship Wt.	Notes
1/4	1075	460	3736H	◆	7.5	0.8	6	4.6	11.1	11	H25
1/3	1075	460	3737H	◆	7.5	1.0	6	5.1	11.6	15	H25
1/2	1075	460	3738H	◆	10	1.5	6	5.3	11.8	18	H25
1/2-1/6	1075/2	460	5480H	◆	10	1.3	5	5.6	11.1	20	H43
3/4	1075	460	3742H	◆	10	2	6	6.3	12.9	23	
3/4-1/4	1075/2	460	5481H	◆	15	2.2	5	6.3	11.9	24	H43

575 Volt

HP	RPM/ Spd.	Voltage	Catalog Number	List	Cap. MFD	Amps	Shaft N	Shell XI	Total C	Ship Wt.	Notes
1/4	1075	575	1295H	◆	7.5	0.6	5.0	4.4	9.8	11.4	
1/3	1075	575	1278H	◆	7.5	0.7	5.0	5.2	10.9	10	
1/2	1075	575	1098H	◆	10.0	1.3	5.0	6.4	11.4	20	
3/4	1060	575	1099H	◆	12.5	1.8	5.0	6.4	11.4	18	

◆ Refer to Motorboss for Pricing
Note B: Belly Band

Note H25: Includes 4 Holes With Screws In Shell For RHEEM® Mount
Note H43: Side Shell & Lead End Mounting Screws Included In Carton

